Data for installation and operation

Dimensions	Test space	Cabinet (required space)
	580 mm wide	865 mm wide
	620 mm deep	1895 mm deep
	750 mm high	1780 mm high

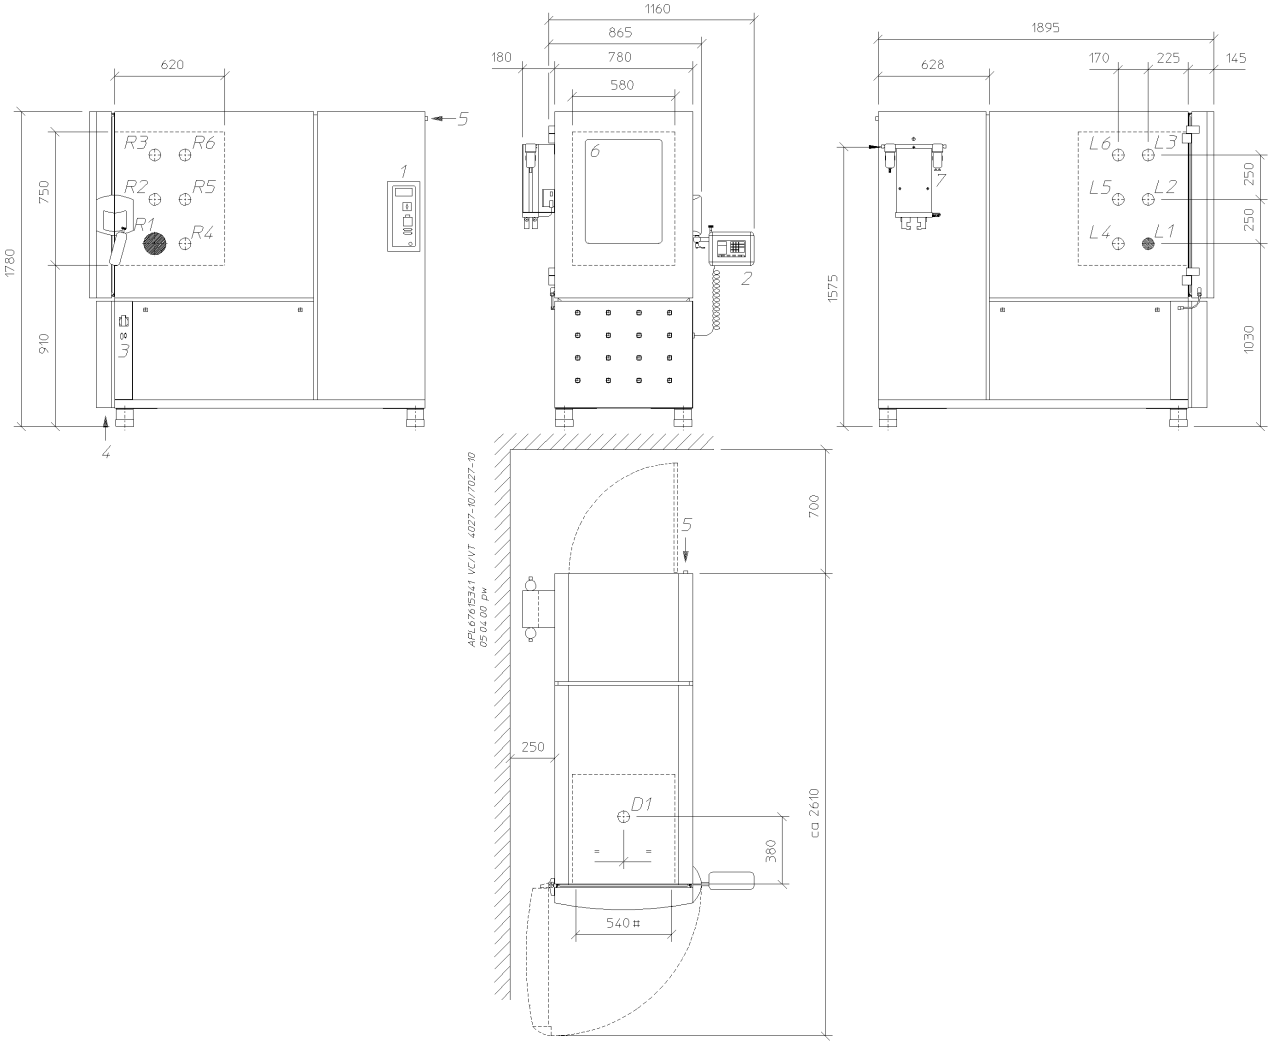

- Entry port installed in basic version
  R1: NW 125 mm
  L1: NW 50 mm
  R2... additional installation positions r.h. side(option)
  L2.... additional installation positions l.h. side (option)
  D1 Installation position in the ceiling (option)

1) Main switch panel
2) Operator device >touch panel<
3) Connector panel
4) Connection for cooling water, overflow and condensate drain
5) Electrical connection, cable length approx. 3.5 m
6) Door with window (option)
7) Compressed-air dryer (option)

\# Distance between shelf supports