


DS48057

3/4 ANGLE PROJECTION

USED ON

D or
CAT No

M.A/S.A

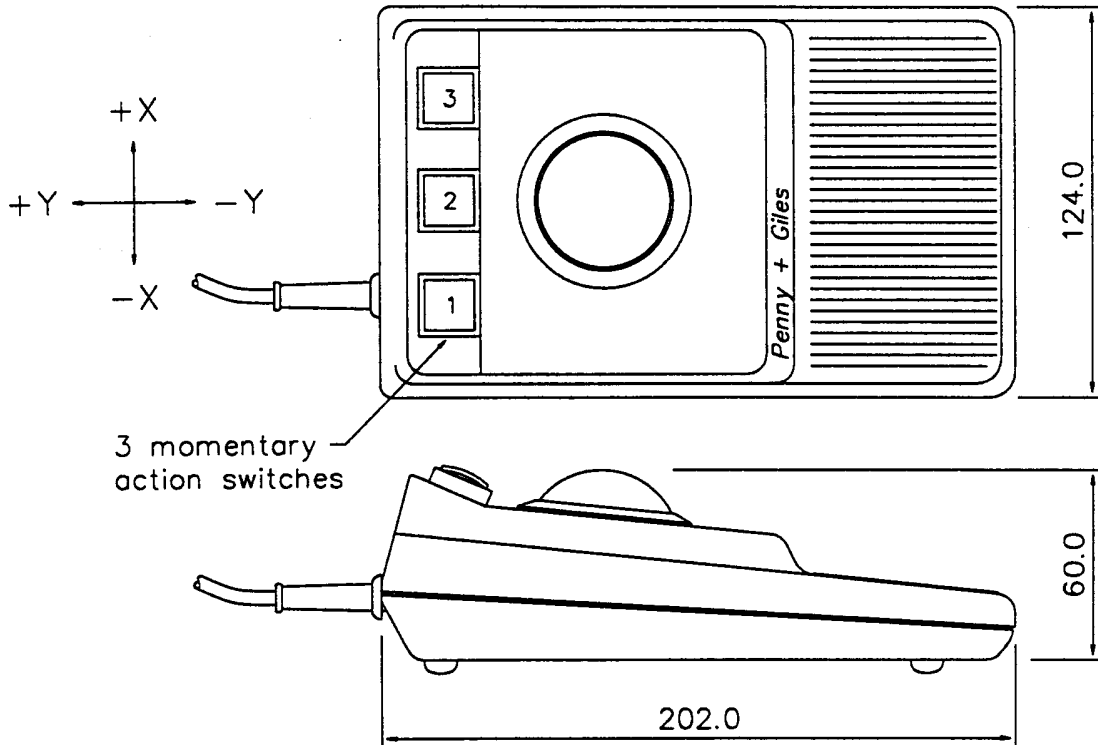

3 momentary
action switches


Specification

- Case ~ A.B.S, colour: grey.
- Ball ~ Ø2.0" colour: yellow.
- Cable ~ 3 mtrs, pvc sheath, colour: grey.
- Connector ~ 25 way 'D' type socket + 3.5mm jack socket.
- Supply ~ +6 to 12V d.c @ 150mA.
- Output ~ RS232 levels, format 22 (microsoft), 1200 baud.

Connection Details

Pin	Description	Colour
1	Protective gnd	Screen
2	Rx	Blue
3	Tx	Green
4	CTS	Yellow
7	0V gnd	Black
All other pins N/C		

3.5mm jack socket,
tip positive.
+6 to 12V @ 150mA.



25 way 'D' type socket.

ISSUE	1	2	3				
DATE	18.9.89	5.11.90	14.4.93				
CHANGE	CH50	CH50.2	CH50.5				
MATERIAL	-		FINISH	-		TOL.	
						±1.0	
APP						SCALE	NTS
						DIMS	mm

PENNY + GILES

Penny & Giles
Computer Products LTD
Christchurch Dorset.
Tel (0202) 481751

DRAWN
R.HARNETT

TITLE
DESK TOP TRACKERBALL
(DTB2/25) STANDARD

SIZE
A4

DRAWING NUMBER
DS48057